


BATHY 240 - 22

USO INTENSIVO

attuatori oleodinamici per cancelli ad ante battenti | hydraulic operators for swing gates | opérateurs hydraulique pour portails battants
| accionadores hidráulicos para puertas de hojas batientes

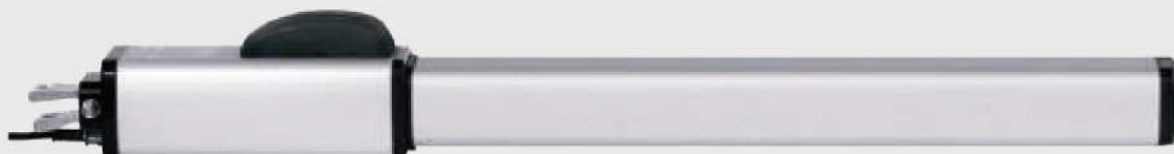

MADE IN ITALY CEE

DATI TECNICI DATA SHEETS FICHE TECHNIQUE DATOS TECNICOS	BATHY 240 - 22 R	BATHY 240 - 22 BA	BATHY 240 - 22 BC	BATHY 240 - 22 BAC
Tensione alimentazione Power supply Tension alimentation Tensione de alimentació*	230 Vac 50 60 Hz	230 Vac 50 60 Hz	230 Vac 50 60 Hz	230 Vac 50 60 Hz
Motore elettrico Electric motor Moteur électrique Motor eléctrico (rpm)	1400	1400	1400	1400
Corrente Current Courant Corriente (A)	1 A	1 A	1 A	1 A
Potenza motore Motor power Puissance moteur Potencia motore (W)	250 W	250 W	250 W	250 W
Termoprotezione Thermal protection Protection thermique Protección térmica	120 °	120 °	120 °	120 °
Condensatore Capacitor Condensateur Condensador	10 µf	10 µf	10 µf	10 µf
Forza di spinta Thrust forcer Force de poussé Fuerza de empuje (max)	550 daNm	550 daNm	550 daNm	550 daNm
Corsa stelo Extension stem Etendue tige Recorrido vastago	240 mm	240 mm	240 mm	240 mm
Velocità lineare stelo Speed linear stem Vitesse tige linéaire Velocidad lineal vastago	1,3 cm sec	1,3 cm sec	1,3 cm sec	1,3 cm sec
Rallentamento slowdown Rallentissement Parada suave	no	no	no	no
Portata pompa Pump capacity Capacité pompe Capacidad bomba	1 l min	1 l min	1 l min	1 l min
Olio Oil Huile Aceite	Total 52 AT 42	Total 52 AT 42	Total 52 AT 42	Total 52 AT 42
Temp. di funzionamento Operating temp. Temp. de fonctionnement Temp. ambiente	-20° C +70° C	-20° C +70° C	-20° C +70° C	-20° C +70° C
Grado di protezione Class protection Classe de protection Grado de protección	IP 55	IP 55	IP 55	IP 55
Blocco anta Swing lock Blocage portail Bloqueo hoja	no	apertura / opening ouverture / abertura	chiusura / closing / fermeture / cierre	apertura chiusura / opening closing ouverture fermeture / abertura cierre
Peso Weight Poids Peso	8,6 Kg	8,6 Kg	8,6 Kg	8,6 Kg
Dimensioni Dimensions Dimensions moteur Medidas (L x P x H) mm	960 x 99 x 123	960 x 99 x 123	960 x 99 x 123	960 x 99 x 123
Lunghezza anta Leaf length Longueur portail Longitud de la hoja (max) m.	3	1,8	1,8	1,8

* Disponibile | Available | Disponible | Disponible: 110 Vac - 60 Hz | 115 Vac - 60 Hz | 127 Vac - 60 Hz



BATHY 270

USO INTENSIVO

attuatori oleodinamici per cancelli ad ante battenti | hydraulic operators for swing gates | opérateurs hydraulique pour portails battants
| accionadores hidráulicos para puertas de hojas batientes



MADE IN ITALY CE

DATI TECNICI DATA SHEETS FICHE TECHNIQUE DATOS TECNICOS	BATHY 270 R	BATHY 270 BA	BATHY 270 BC	BATHY 270 BAC
Tensione alimentazione Power supply Tension alimentation Tensione de alimentación**	230 Vac 50/60 Hz	230 Vac 50/60 Hz	230 Vac 50/60 Hz	230 Vac 50/60 Hz
Motore elettrico Electric motor Moteur électrique Motor eléctrico (rpm)	1400	1400	1400	1400
Corrente Current Courant Corriente (A)	1 A	1 A	1 A	1 A
Potenza motore Motor power Puissance moteur Potencia motore (W)	250 W	250 W	250 W	250 W
Termoprotezione Thermal protection Protection thermique Protección térmica	150 °	150 °	150 °	150 °
Condensatore Capacitor Condensateur Condensador	10 µf	10 µf	10 µf	10 µf
Forza di spinta Thrust forcer Force de poussée Fuerza de empuje (max)	650 daNm	650 daNm	650 daNm	650 daNm
Corsa stelo Extension stem Etendue tige Recorrido vastago	270 mm	270 mm	270mm	270mm
Velocità lineare stelo Speed linear stem Vitesse tige linéaire Velocidad lineal vastago	1,3 cm/sec	1,3 cm/sec	1,3 cm/sec	1,3 cm/sec
Rallentamento corsa idraulico Hydraulic slowdown Rallentissement hydraulique Parada suave hidráulico		chiusura closing fermeture cierre		
Portata pompa Pump capacity Capacité pompe Capacidad bomba	1 l/min	1 l/min	1 l/min	1 l/min
Olio Oil Huile Aceite	Total 52/AT 42	Total 52/AT 42	Total 52/AT 42	Total 52/AT 42
Temp. di funzionamento Operating temp. Temp. de fonctionnement Temp. ambiente	-20° C +70° C	-20° C +70° C	-20° C +70° C	-20° C +70° C
Grado di protezione Class protection Classe de protection Grado de protección	IP 55	IP 55	IP 55	IP 55
Blocco anta Swing lock Blocage portail Bloqueo hoja	no	apertura / opening ouverture / abertura	chiusura / closing fermeture / cierre	apertura chiusura / opening closing ouverture fermeture / abertura cierre
Peso Weight Poids Peso	11 Kg	11 Kg	11 Kg	11 Kg
Dimensioni Dimensions Dimensions moteur Medidas (L x P x H) mm	1090 x 99 x 123	1090 x 99 x 123	1090 x 99 x 123	1090 x 99 x 123
Lunghezza anta Leaf length Longueur portail Longitud de la hoja (max) m.	3,5	3	3	3

* Disponibile | Available | Disponible | Disponible: 110 Vac - 60 Hz | 115 Vac - 60 Hz | 127 Vac - 60 Hz



BATHY 390

USO INTENSIVO

attuatori oleodinamici per cancelli ad ante battenti | hydraulic operators for swing gates | opérateurs hydraulique pour portails battants
| accionadores hidráulicos para puertas de hojas batientes



MADE IN ITALY



DATI TECNICI DATA SHEETS FICHE TECHNIQUE DATOS TECNICOS	BATHY 390 R	BATHY 390 BA	BATHY 390 BC	BATHY 390 BAC
Tensione alimentazione Power supply Tension alimentation Tensione de alimentació**	230 Vac 50 60 Hz	230 Vac 50 60 Hz	230 Vac 50 60 Hz	230 Vac 50 60 Hz
Motore elettrico Electric motor Moteur électrique Motor electrico (rpm)	1400	1400	1400	1400
Corrente Current Courant Corriente (A)	1,9 A	1,9 A	1,9 A	1,9 A
Potenza motore Motor power Puissance moteur Potencia motore (W)	350 W	350 W	350 W	350 W
Termoprotezione Thermal protection Protection thermique Protección térmica	150 °	150 °	150 °	150 °
Condensatore Capacitor Condensateur Condensador	10 µf	10 µf	10 µf	10 µf
Forza di spinta Thrust forcer Force de poussé Fuerza de empuje (max)	780 daNm	780 daNm	780 daNm	780 daNm
Corsa stelo Extension stem Etendue tige Recorrido vastago	390 mm	390 mm	390 mm	390 mm
Velocità lineare stelo Speed linear stem Vitesse tige linéaire Velocidad lineal vastago	1,3 cm sec	1,3 cm sec	1,3 cm sec	1,3 cm sec
Rallentamento corsa idraulico Hydraulic slowdown Rallentissement hydraulique Parada suave hidraulico		chiusura closing fermature cierre		
Portata pompa Pump capacity Capacité pompe Capacidad bomba	1 l min	1 l min	1 l min	1 l min
Olio Oil Huile Aceite	Total 52 AT 42	Total 52 AT 42	Total 52 AT 42	Total 52 AT 42
Temp. di funzionamento Operating temp. Temp. de fonctionnement Temp. ambiente	-20° C +70° C	-20° C +70° C	-20° C +70° C	-20° C +70° C
Grado di protezione Class protection Classe de protection Grado de protección	IP 55	IP 55	IP 55	IP 55
Blocco anta Swing lock Blocage portail Bloqueo hoja	no	apertura / opening ouverture / abertura	chiusura / closing fermeture / cierre	apertura chiusura / opening closing ouverture fermeture / abertura cierre
Peso Weight Poids Peso	12 Kg	12 Kg	12 Kg	12 Kg
Dimensioni Dimensions Dimensions moteur Medidas (L x P x H) mm	1330 x 99 x 123	1330 x 99 x 123	1330 x 99 x 123	1330 x 99 x 123
Lunghezza anta Leaf length Longueur portail Longitud de la hoja (max) m.	6	3,5	3,5	3,5

* Disponibile | Available | Disponible | Disponible: 110 Vac - 60 Hz | 115 Vac - 60 Hz | 127 Vac - 60 Hz

